CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD SAN FRANCISCO BAY REGION

ORDER NO. 78-66

WASTE DISCHARGE REQUIREMENTS FOR:

UPPER VALLEY DISPOSAL SERVICE, INC., WALTER TAMAGNI, AND THE COUNTY OF NAPA CLASS II-2 SOLID WASTE DISPOSAL SITE CALISTOGA, NAPA COUNTY

The California Regional Water Quality Control Board, San Francisco Bay Region, (hereinafter called the Board) finds that:

- 1. Upper Valley Disposal Service, Inc., Walter Tamagni, and the County of Napa, hereinafter called the discharger, submitted a Report of Waste Discharge for the Upper Valley Landfill dated February 26, 1975. In addition, an engineering report, "Proposed Improvements and Operation Procedures at the Napa County Dumpsite" dated August 1974 and a report, "Report of Waste Discharge Disposal Operation Date for Upper Valley Landfill" dated July 1, 1975, have been submitted for this solid waste disposal site.
- 2. The discharger currently disposes of Group 2 and 3 wastes at a 112 acre parcel owned by Walter Tamagni, 4397 Silverado Trail, Calistoga, California, and leased by the County of Napa. The disposal site is located north of the Silverado Trail about three miles east of the City of Calistoga as shown in Attachment A, which is incorporated herein and made part of this Order.
- 3. The disposal site is underlain by igneous volcanic materials. There is no evidence of useable groundwater under the site. The nearest watercourse is an unnamed creek outside the property which is a tributary to the Napa River.
- 4. This disposal site meets the criteria contained in the California Administrative Code, Title 23, Chapter 3, Subchapter 15, for classification of a portion of the site as a Class II-2 disposal site to receive Group 2 and 3 wastes.
- 5. The beneficial uses of the adjacent creek and Napa River are:
 - a. Recreation
 - b. Esthetic enjoyment
 - c. Preservation and enhancement of fish, wildlife, and other aquatic resources
 - d. Agricultural water supply for stock watering, irigation and frost protection, and
 - e. Fish migration and habitat.
- 6. The land within 1000 feet of the site is used for general open space and vineyards.

- 7. The Board adopted a Water Quality Control Plan for San Francisco Bay Basin in April 1975 and this Order implements the water quality objectives stated in that plan.
- 8. The Board has notified the discharger and interested agencies and persons of its intent to prescribe waste discharge requirements for the discharge and has provided them with an opportunity for a public hearing and an opportunity to submit their written views and recommendations.
- 9. The Board, in a public meeting, heard and considered all comments pertaining to the discharge.
- 10. This project involves the continued operation of a privately owned Class II-2 facility with minor alteration to the land. Consequently, this project will not have a significant effect on the environment based upon the exemption provided in Section 15101, Title 14, California Administrative Code.

IT IS HEREBY ORDERED THAT Upper Valley Disposal Service, Walter Tamagni, the County of Napa and any other person who operates this site, shall comply with the following:

A. Specifications for Solid Waste Disposal Site

- 1. The disposal of waste shall not cause pollution or a nuisance as defined in Section 13050(m) of the California Water Code.
- 2. Group 2 wastes shall not be placed in or allowed to contact ponded water from any source whatsoever.
- 3. Group 1 wastes shall not be stored or deposited at this site.
- 4. Waste materials shall not be disposed of in any location where they can be carried from the disposal site and discharged into waters of the State.
- 5. Sewage sludge or liquid wastes shall not be discharged with Group 2 and 3 wastes, unless approved in writing by the Executive Officer of the Board.
- 6. The discharger shall remove and relocate any wastes which are discharged at this site in violation of these requirements.

B. Leachate and Drainage Specifications for Solid Waste Disposal Site

- 1. Leachate from Group 2 wastes or ponded water containing leachate shall not be discharged to waters of the State. Water used during disposal site operations shall be limited to a minimal amount reasonably necessary for purposes of dust control and fire suppression.
- 2. The site shall be protected from any washout or erosion of wastes or covering material, and from inundation, which could occur as a result of floods having a predicted frequency of once in 100 years.

- 3. Surface drainage from tributary areas, and internal site drainage from surface or subsurface sources shall not contact or percolate through Group 2 wastes deposited during the active life of the site.
- 4. Vertical and lateral hydraulic continuity with surface and useable groundwaters shall be prevented by the presence of a natural clay barrier of at least five feet in thickness and a permeability of 1 x 10⁻⁶ cm/sec or less or equivalent on the bottom and sides of disposal areas. If such a natural condition does not exist, an artificial barrier shall be constructed to meet the above specification.
- 5. During the winter months when precipitation can be expected, impervious covers shall be maintained over all but the active disposal area. The disposal activity shall be confined to the smallest area possible based upon anticipated quantity of wastes and operational procedures.
- 6. The discharge of waste shall not cause the following conditions to exist in waters of the State at any place:
 - a. Surface water;

Floating, suspended, or deposited macroscopic particulate matter or foam;

Bottom deposits or aquatic growths;

Alteration of temperature, turbidity, or apparent color beyond present natural background levels;

Toxic or other deleterious substances to be present in concentrations or quantities which will cause deleterious effects on aquatic biota, wildlife or waterfowl, or which render any of these unfit for human consumption either at levels created in the receiving waters or as a result of biological concentration.

b. Groundwater

The useable groundwater shall not be degraded as a result of the solid waste disposal operation.

7. The migration of methane gas from group 2 wastes shall be controlled as necessary to prevent creation of a nuisance.

C. Provisions

- 1. The discharger shall comply with all sections of this Order immediately upon adoption.
- 2. No later than November 15, 1978, the discharger shall submit to the Regional Board a site operation manual. The manual shall include site management, construction and maintenance of access roads and perimeter ditches, methods for deposition, compaction and covering of wastes, site maintenance, and other operational procedures.


- 3. The discharger shall submit a site closure plan to the Board which shall conform to Resolution No. 77-7 established by the Regional Board. The site closure plan shall be prepared by or under the supervision of a registered engineer or a certified engineering geologist and shall be submitted no later then February 15, 1979.
- 4. This Board considers the property owner to have a continuing responsibility for correcting any problems which may arise in the future as a result of this waste discharge or water applied to this property during subsequent use of the land for other purposes.
- 5. The discharger shall file with the Board technical reports on self-monitoring work performed according to the detailed specifications contained in any Monitoring and Reporting Program which may be directed by the Executive Officer.
- 6. The discharger shall maintain a copy of the Order at the site so as to be available at all times to site operating personnel.
- 7. The discharger shall permit the Regional Board:
 - (a) Entry upon premises on which waste are located or in which any required records are kept,
 - (b) Access to copy any records required to be kept under terms and conditions of this Order,
 - (c) Inspection of monitoring equipment or records, and
 - (d) Sampling of any discharge.
- 8. The discharger shall file with this Board a report of any material change or proposed change in the character, location or quantity of this waste discharge. For the purpose of these requirements, this includes any proposed change in the boundaries or contours of the disposal area(s).

I, Fred H. Dierker, Executive Officer, do hereby certify the foregoing is a full, true, and correct copy of an Order adopted by the California Regional Water Quality Control Board, San Francisco Bay Region, on August 15, 1978

FRED H. DIERKER Executive Officer

Attachements:

A - Map Resolution No. 77-7 Self-Monitoring Program

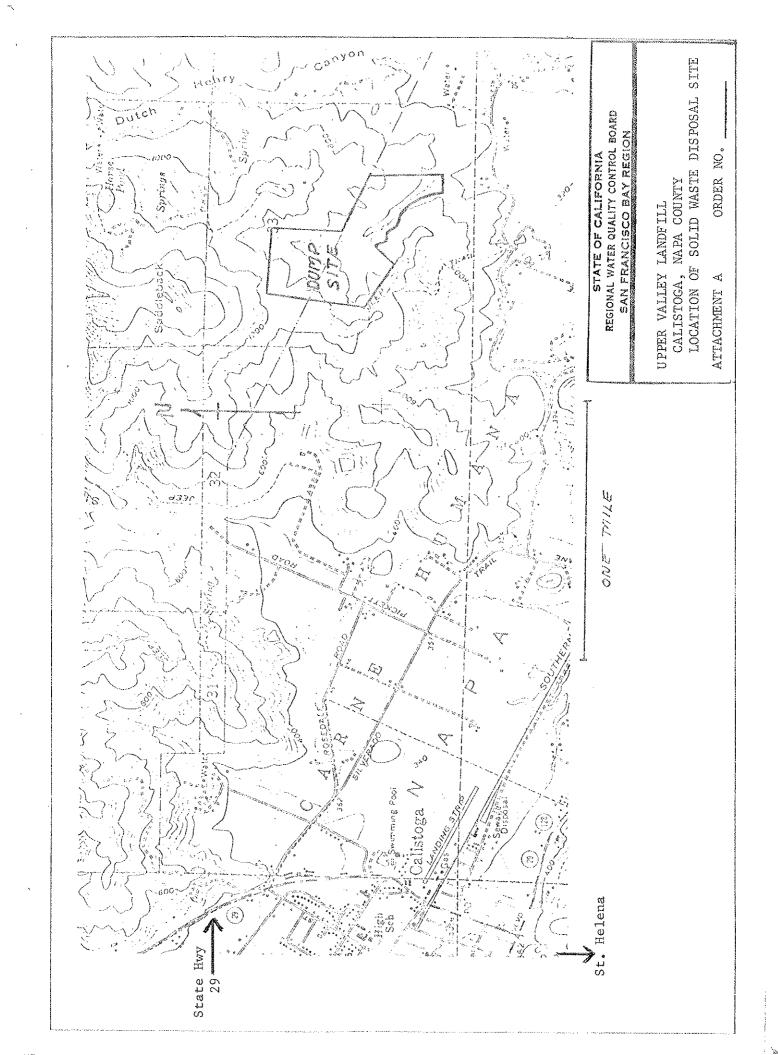

CALLFORNTA REGIONAL WATER QUALLTY CONTROL BOARD SAN FRANCISCO BAY REGION

RESOLUTION NO. 77-7

MINIMUM CRITERIA FOR PROPER CLOSURE OF CLASS II SOLID WASTE DISPOSAL SITES

- I. WHEREAS, experience has shown that Class II solid waste disposal sites can be sources of serious water pollution problems even after their use has been terminated, unless properly closed, and
- II. WHEREAS, these problems may include: odors, discharge of leachate, exposed refuse due to inadequate cover, and ponding of refuse-polluted water on the site, and
- III. WHEREAS, Section 2535 of the California Administrative Code provides as follows:

Completion of Disposal Operations. (a) Prior to cessation of disposal operations at a waste disposal site, the operator shall submit a technical report to the appropriate regional board describing the methods and controls to be used to assure protection of the quality of surface and groundwaters of the area during final operations and with any proposed subsequent use of the land. This report shall be prepared by or under the supervision of a registered engineer or a certified engineering geologist.

- (b) The methods used to close a site and assure continuous protection of the quality of surface and groundwater shall comply with waste discharge requirements established by the regional board.
- (c) The owner of the waste disposal site shall have a continuing responsibility to assure protection of useable waters from the waste discharge, and from gases and leachate that are caused by infiltration of precipitation or drainage waters into the waste disposal areas or by infiltration of water applied to the waste disposal areas during subsequent use of the property for other purposes, and
- IV. WHEREAS, the establishment of minimum criteria for proper closure of Class II solid waste disposal sites is desirable to protect the quality of waters of the State and to alert site owners and operators as to their specific responsibilities, and

- VII. BE IT FURTHER RESOLVED that this Board's Executive Officer will request that closure plans be submitted by operators of all Class II sites at the earliest practicable date. Closure plans will be approved by this Board by inclusion in waste discharge requirements. The Board will amend closure plans as necessary to provide for conformance with the above minimum criteria. Site closure plans shall include the following:
 - a. The boundaries of areas used for waste disposal.
 - b. Method of control of surface drainage flow from the site.
 - c. Evaluation of the anticipated settlement due to decomposition and consolidation of the wastes.
 - d. Thickness of cover and physical properties including permeability, expansion characteristics and erodibility.
 - e. Relationship of waste disposal area to underlying ground-water quality.
 - f. Location of groundwater monitoring points.
 - g. Method for control of methane.
 - h. Proposed subsequent use of the land.
- VIII. BE IT FURTHER RESOLVED that this Board will normally require implementation of the site closure plan as rapidly as possible after completion of group 2 waste disposal operations at a site or portion thereof. The Board may authorize delays of specified duration in meeting final slope requirements pending determination of subsequent land use, provided interim measures are taken to protect water quality.
 - IX. BE IT FURTHER RESOLVED that it is the intention of this Board to take all measures practicable to ensure that subsequent owners of sites are made aware of site closure requirements.
- I, Fred H. Dierker, Executive Officer, do hereby certify the foregoing is a full, true, and correct copy of a Resolution adopted by the California Regional Water Quality Control Board, San Francisco Bay Region, on July 19, 1977.

FRED H. DIERKER Executive Officer

CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD SAN FRANCISCO BAY REGION

SELF-MONITORING PROGRAM FOR

Upper Valley Disposal Service, Inc. Walter Tamagni, and the County of Napa Class II-2 Solid Waste
Disposal Site, Calistoga, Napa County

ORDER NO. 78-66

CONSISTS OF

PART A

AND

PART B

CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD SAN FRANCISCO BAY REGION

SELF-MONITORING PROGRAM

FOR

UPPER VALLEY DISPOSAL SERVICE, INC., WALTER TAMAGNI, AND THE COUNTY OF NAPA CLASS II-2, SOLID WASTE DISPOSAL SITE CALISTOGA, NAPA COUNTY

PART A

A. GENERAL

Reporting responsibilities of waste dischargers are specified in Sections 13225(a), 13267(b), 13268, 13383, and 13387(b) of the California Water Code and this Regional Board's Resolution No. 73-16.

The principal purposes of a monitoring program by a waste discharger, also referred to as self-monitoring program, are: (1) to document compliance with waste discharge requirements and prohibitions established by this Regional Board, (2) to facilitate self-policing by the waste discharger in the prevention and abatement of pollution arising from waste discharge, (3) to develop or assist in the development of effluent or other limitations, discharge prohibitions, national standards of performance, pretreatment and toxicity standards, and other standards, and (4) to prepare water and wastewater qualilty inventories.

B. SAMPLING AND ANALYTICAL METHODS

Sample collection, storage, and analyses shall be performed according to the latest edition of Standard Methods for the Examination of Water and Wastewater prepared and published jointly by the American Public Health Association, American Water Works Association, and Water Pollution Control Federation, or other methods approved and specified by the Executive Officer of this Regional Board including the methods specified in attached APPENDIX E.

Water and waste analyses shall be performed by a laboratory approved for these analyses by the State Department of Health or a laboratory approved by the Executive Officer. The director of the laboratory whose name appears on the certification shall supervise all analytical work in his laboratory and shall sign all reports of such work submitted to the Regional Board.

All monitoring instruments and equipment shall be properly calibrated and maintained to ensure accuracy of measurements.

C. DEFINITION OF TERMS

1. Grab sample means a sample collected at any time.

2. Standard Observations

a. Receiving Water Unnamed Creek and Napa River

- (1) Discoloration and turbidity: description of color, source, and size of affected area.
- (2) Odor: presence or absence, characterization, source, and distance of travel.
- (3) Evidence of beneficial water use: presence of water-associated wildlife, fishermen, and other recreational activities in the vicinity of the sampling stations.
- (4) Hydrographic condition:
 - (a) Water and sampling depths.
- (5) Weather condition:
 - (a) Wind direction and estimated velocity.
 - (b) Precipitation total precipitation during the previous five days and on the day of observation.

b. Land Retention or Disposal Area

This applies both to liquid and solid wastes confined or unconfined.

- (1) Determine height of the freeboard at lowest point of dikes confining liquid wastes.
- (2) Evidence of leaching liquid from area of confinement and estimated size of affected area. (Show affected area on a sketch.)
- (3) Odor: presence or absence, characterization, source, and distance of travel.
- (4) Estimated number of waterfowl and other water-associated birds in the disposal area and vicinity.

D. SCHEDULE OF SAMPLING, ANALYSES, AND OBSERVATIONS

The discharger is required to perform observations, sampling, and analyses according to the schedule in Part B with the following conditions:

E. RECORDS TO BE MAINTAINED

- 1. Written records shall be maintained at the landfill site or office and shall be retained for a minimum of 3 years. This period of retention shall be extended during the course of any unresolved litigation regarding this discharge or when requested by the Regional Board. Such records shall show the following for each sample:
 - a. Identity of sampling and observation stations by number.
 - b. Date and time of sampling and/or observations.
 - c. Date and time that analyses are started and completed, and name of personnel performing the analyses.
 - d. Complete procedure used, including method of preserving sample and identity and volumes of reagents used. A reference to specific section of Standard Methods is satisfactory.
 - e. Calculations of results.
 - f. Results of analyses and/or observations.

F. REPORTS TO BE FILED WITH THE REGIONAL BOARD

1. Written reports shall be filed for each calendar month (unless specified otherwise in Part B) by the fifteenth day of the following month. In addition, an annual report shall be filed as indicated in F-1-f. The reports shall be comprised of the following:

a. Letter of Transmittal:

A letter transmitting self-monitoring reports should accompany each report. Such a letter shall include a discussion of requirement violations found during the past month and actions taken or planned for correcting violations, such as plant operation modifications and/or plant facilities expansion. If the discharger has previously submitted a detailed time schedule for correcting requirement violations, a reference to the correspondence transmitting such schedule will be satisfactory. The letter shall contain a statement by the official, under penalty of perjury, that to the best of the signer's knowledge the report is true and correct.

Monitoring reports shall be signed as follows:

(1) In the case of corporations, by a principal executive officer at the level of vice-president or his duly authorized representative if such representative is responsible for the overall operation of the facility from which the discharge originates,

- (2) In the case of a partnership, by a general partner, or
- (3) In the case of a sole proprietorship, by the proprietor,
- (4) In the case of a municipal, State, or other public facility, by either a principal executive officer, ranking elected official, or other duly authorized employee.

b. Compliance Evaluation Summary

Each report shall be accompanied by a compliance evaluation summary sheet prepared by the discharger. The report format will be specified by the Regional Board.

c. Map or Aerial Photograph

A map or aerial photograph shall accompany the report showing sampling and observation station locations.

d. Results of Analyses and Observations

Tabulations of the results from each required analysis specified in Part B by date, time, type of sample, and station, signed by the laboratory director. The report format will be specified by the Regional Board.

e. List of Approved Analyses

- (1) Listing of analyses for which the discharger is approved by the State Department of Health.
- (2) List of analyses performed for the discharger by another approved laboratory (and copies of reports signed by the laboratory director of that laboratory shall also be submitted as part of the report).

f. Annual Reporting

By October 1 of each year, the discharger shall submit an annual report to the Regional Board covering the previous calendar year. The report shall contain:

- 1. Tabular and graphical summaries of the monitoring data obtained during the previous year.
- 2. Comprehensive discussion of the compliance record and the corrective actions taken or planned which may be needed to bring the discharger into full compliance with the waste discharge requirements.
- 3. A map showing the area in which filling has been completed during prior calendar year.

PART B

I. DESCRIPTION OF SAMPLING STATIONS & SCHEDULE OF SAMPLING, ANALYSES & OBSERVATIONS

A. WASTE MONITORING

- 1. Monthly, record the total volume and weight of a refuse (in cubic yards and tons) deposited on the site during the month, and the daily average. Report quarterly.
- 2. Monthly, record the volume of fill completed, in place of cubic yards, showing the location(s) and dimensions on a sketch or a map. Report quarterly.

B. ON SITE OBSERVATION

Station	Description				
S-I S-I	Observation stations located on presently active area or completed portion of the solid waste disposal site at grid squares delineated by 500 foot grid network.				
Station	Frequency of Observation	Observations			
All S Sta- tions in active dis- posal areas	Weekly throughout the year	1.	Evidence of ponded water at any point on the disposal site.		
		2.	Evidence of refuse not confined within a cell or parcel.		
		3.	Evidence of erosion and/or "day-lighted" refuse.		
		4 .	Evidence of waste in contact with pools of surface water.		
		5,	Evidence of leachate leaving the disposal site, and estimated size of affected area.		

All "P" stations must be monitored according to the above described frequency and report quarterly.

C. SEEPAGE AND/OR LEACHATE MONITORING

Station	Description			
II. I * n *	At a point in each discharge point from the disposal area(s) and at the point where liquid leaves the discharger's property. Include a map indicating locations of discharge(s).			

Station	Type of Sample and Frequency	Analyses	Units
All L Stations	Grab sample daily during each discharge or occurrence	COD Dissolved sulfide Odors Color pH Total Coliform	mg/l mg/l description description electrometric units MPN/100 ml

A report shall be made by telephone of any seepage or leachate leaving the property immediately after occurrence. A written report shall be filed with this Board within 5 days and shall contain the following information: 1) Map showing location(s) of discharge, 2) flow rate, 3) nature of effect (i.e., discoloration of receiving water, size of affected area), and 4) corrective measures undertaken.

I, Fred H. Dierker, Executive Officer, do hereby certify that the foregoing Self-Monitoring Program:

- 1. Has been developed in accordance with the procedure set forth in this Regional Board's Resolution No. 73-16 in order to obtain data and document compliance with waste discharge requirements established in the Regional Board Order No. 78-66
- 2. Has been ordered in writing by the Executive Officer on August 15, 1978, and becomes effective from September 1, 1978.
- 3. May be reviewed at any time subsequent to the effective date upon written notice from either the Executive Officer or the discharger and will be revised upon written agreement of the Executive Officer and the discharger.

FRED H. DIERKER Executive Officer

Attachment:

Appendix E

Example of Reporting Format